

Handled by
Sören Giver/MY

HELSINGBORG
1995-02-20

Ref.
2950767
Your ref.
DG 2

REGISTERED LETTER

European Patent Office
D-80298 MÜNCHEN
TYSKLAND

"EURO-PCT; REGIONAL PHASE"

Procedural steps according to Art. 39 PCT, Art. 156 EPC
European Application No. 94915725.9
International Application (IA-PCT) No. PCT/SE94/00386
Applicant(s): VÄLINGE ALUMINIUM AB

If no copy of the IA and, if required under Art. 22(1) PCT, translation thereof is attached hereto, this implies that the International Bureau has already furnished such copy and such translation to you. It is requested that designation of those States in respect of which designation fees have not been paid by the time the period of grace provided for in Rule 85a EPC expires be deemed to have been withdrawn by the applicant and that in this respect no communication pursuant to Rule 69(1) EPC be sent.

I Designation fees are paid in respect of these EPC contracting states:

☒ DE ☒ NL ☒ GB ☒ CH/LI ☒ BE ☒ ES ☒ FR ☒ MC
☒ LU ☒ SE ☒ AT ☒ IT ☒ DK ☒ GR ☒ PT ☒ IE

II Request for examination, Art. 94, 150(2)/Art. 14(4) and Rule 6(3)/EPC

- (x) Härmad begäres patenterbarhetsprövning för fastställande huruvida rubricerade europeiska patentansökan uppfyller fordringarna enligt EPC.
- (x) It is hereby requested that an examination be carried out to establish whether the European Patent Application and the invention to which it relates meet the requirements of the EPC.

III Representative, please see the general authorisation No., to be entered in the Register of European Patents and to receive notifications (other representatives are given on the authorisation):
Arthur Berglund et al. with address indicated below.

.....
Authorized Representative

Enclosures:

- | | |
|--|----------------------------------|
| () Copy of the IA | (x) PCT-publication document |
| () Translation of the IA | (x) Authorisation |
| () Amendment pursuant to 86(2) EPC | (x) Designation of inventor |
| () description () claims () drawing | () Translation of priority doc. |
| | (x) Debit order |
| (x) Acknowl. copy which please return | () Int. Prel. Examin. Report |

HELSINGBORG

Berga Allé 1
S-254 52 HELSINGBORG
Fax +46 42 16 09 42
Tel +46 42 16 30 45

MALMÖ (Head Office)

Bellevuevägen 46
Box 5117
S-200 71 MALMÖ
Fax +46 40 26 05 16
Tel +46 40 98 51 00

Other Offices:

LUND
VÄXJÖ
GÖTEBORG
STOCKHOLM
SÜDERHAMN




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : E04F 15/14, 15/02, 13/08		A1	(11) International Publication Number: WO 94/26999
			(43) International Publication Date: 24 November 1994 (24.11.94)
(21) International Application Number: PCT/SE94/00386		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, HU, JP, KG, KP, KR, KZ, LK, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, TJ, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 29 April 1994 (29.04.94)			
(30) Priority Data: 9301595-6 10 May 1993 (10.05.93) SE			
(71) Applicant (for all designated States except US): VÄLINGE ALUMINIUM AB [SE/SE]; Vångavägen 48, S-260 40 Viken (SE).		Published With international search report. In English translation (filed in Swedish).	
(72) Inventor; and (75) Inventor/Applicant (for US only): PERVAN, Tony [SE/SE]; Rådjurastigen 32, S-170 72 Solna (SE).			
(74) Agent: AWAPATENT AB; P.O. Box 5117, S-200 71 Malmö (SE).			

(54) Title: SYSTEM FOR JOINING BUILDING BOARDS

(57) Abstract

The invention relates to a system for laying and mechanically joining building panels, especially thin, hard, floating floors. Adjacent joint edges (3, 4) of two panels (1, 2) engage each other to provide a first mechanical connection locking the joint edges (3, 4) in a first direction (D1) perpendicular to the principal plane of the panels. In each joint, there is further provided a strip (6) which is integrated with one joint edge (3) and which projects behind the other joint edge (4). The strip (6) has an upwardly protruding locking element (8) engaging in a locking groove (14) in the rear side (16) of the other joint edge (4) to form a second mechanical connection locking the panels (1, 2) in a second direction (D2) parallel to the principal plane of the panels and at right angles to the joint. Both the first and the second mechanical connections allow mutual displacement of joined panels (1, 2) in the direction of the joint.

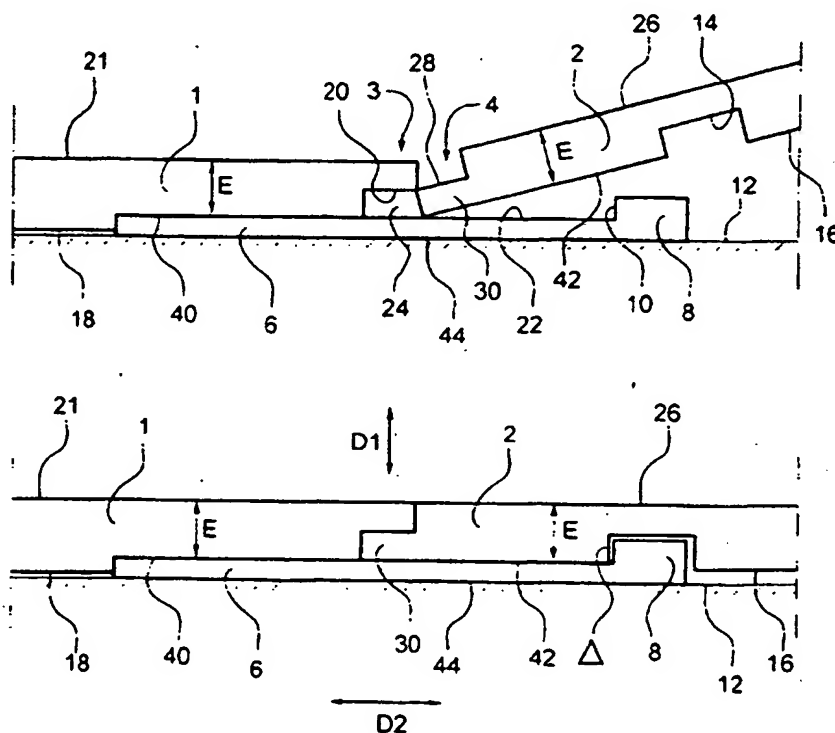

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

SYSTEM FOR JOINING BUILDING BOARDSTechnical Field

The invention generally relates to a system for providing a joint along adjacent joint edges of two building panels, especially floor panels.

5 More specifically, the joint is of the type where the adjacent joint edges together form a first mechanical connection locking the joint edges to each other in a first direction at right angles to the principal plane of the panels, and where a locking device forms a second
10 mechanical connection locking the panels to each other in a second direction parallel to the principal plane and at right angles to the joint edges, the locking device comprising a locking groove which extends parallel to and spaced from the joint edge of one of the panels, and said
15 locking groove being open at the rear side of this one panel.

The invention is especially well suited for use in joining floor panels, especially thin laminated floors. Thus, the following description of the prior art and of
20 the objects and features of the invention will be focused on this field of use. It should however be emphasised that the invention is useful also for joining ordinary wooden floors as well as other types of building panels, such as wall panels and roof slabs.

25

Background of the Invention

A joint of the aforementioned type is known e.g. from SE 450,141. The first mechanical connection is achieved by means of joint edges having tongues and
30 grooves. The locking device for the second mechanical connection comprises two oblique locking grooves, one in the rear side of each panel, and a plurality of spaced-apart spring clips which are distributed along the joint

and the legs of which are pressed into the grooves, and which are biased so as to tightly clamp the floor panels together. Such a joining technique is especially useful for joining thick floor panels to form surfaces of a considerable expanse.

Thin floor panels of a thickness of about 7-10 mm, especially laminated floors, have in a short time taken a substantial share of the market. All thin floor panels employed are laid as "floating floors" without being attached to the supporting structure. As a rule, the dimension of the floor panels is 200 x 1200 mm, and their long and short sides are formed with tongues and grooves. Traditionally, the floor is assembled by applying glue in the groove and forcing the floor panels together. The tongue is then glued in the groove of the other panel. As a rule, a laminated floor consists of an upper decorative wear layer of laminate having a thickness of about 1 mm, an intermediate core of particle board or other board, and a base layer to balance the construction. The core has essentially poorer properties than the laminate, e.g. in respect of hardness and water resistance, but it is nonetheless needed primarily for providing a groove and tongue for assemblage. This means that the overall thickness must be at least about 7 mm. These known laminated floors using glued tongue-and-groove joints however suffer from several inconveniences.

First, the requirement of an overall thickness of at least about 7 mm entails an undesirable restraint in connection with the laying of the floor, since it is easier to cope with low thresholds when using thin floor panels, and doors must often be adjusted in height to come clear of the floor laid. Moreover, manufacturing costs are directly linked with the consumption of material.

Second, the core must be made of moisture-absorbent material to permit using water-based glues when laying the floor. Therefore, it is not possible to make the floors thinner using so-called compact laminate, because

of the absence of suitable gluing methods for such non-moisture-absorbent core materials.

Third, since the laminate layer of the laminated floors is highly wear-resistant, tool wear is a major
5 problem when working the surface in connection with the formation of the tongue.

Fourth, the strength of the joint, based on a glued tongue-and-groove connection, is restricted by the properties of the core and of the glue as well as by the
10 depth and height of the groove. The laying quality is entirely dependent on the gluing. In the event of poor gluing, the joint will open as a result of the tensile stresses which occur e.g. in connection with a change in air humidity.

15 Fifth, laying a floor with glued tongue-and-groove joints is time-consuming, in that glue must be applied to every panel on both the long and short sides thereof.

Sixth, it is not possible to disassemble a glued floor once laid, without having to break up the joints.
20 Floor panels that have been taken up cannot therefore be used again. This is a drawback particularly in rental houses where the flat concerned must be put back into the initial state of occupancy. Nor can damaged or worn-out panels be replaced without extensive efforts, which would
25 be particularly desirable on public premises and other areas where parts of the floor are subjected to great wear.

Seventh, known laminated floors are not suited for such use as involves a considerable risk of moisture
30 penetrating down into the moisture-sensitive core.

Eighth, present-day hard, floating floors require, prior to laying the floor panels on hard subfloors, the laying of a separate underlay of floor board, felt, foam or the like, which is to damp impact sounds and to make
35 the floor more pleasant to walk on. The placement of the underlay is a complicated operation, since the underlay

must be placed in edge-to-edge fashion. Different underlays affect the properties of the floor.

There is thus a strongly-felt need to overcome the above-mentioned drawbacks of the prior art. It is however not possible simply to use the known joining technique with glued tongues and grooves for very thin floors, e.g. with floor thicknesses of about 3 mm, since a joint based on a tongue-and-groove connection would not be sufficiently strong and practically impossible to produce for such thin floors. Nor are any other known joining techniques usable for such thin floors. Another reason why the making of thin floors from e.g. compact laminate involves problems is the thickness tolerances of the panels, being about 0.2-0.3 mm for a panel thickness of about 3 mm. A 3-mm compact laminate panel having such a thickness tolerance would have, if ground to uniform thickness on its rear side, an unsymmetrical design, entailing the risk of bulging. Moreover, if the panels have different thicknesses, this also means that the joint will be subjected to excessive load.

Nor is it possible to overcome the above-mentioned problems by using double-adhesive tape or the like on the undersides of the panels, since such a connection catches directly and does not allow for subsequent adjustment of the panels as is the case with ordinary gluing.

Using U-shaped clips of the type disclosed in the above-mentioned SE 450,141, or similar techniques, to overcome the drawbacks discussed above is, no viable alternative either. Especially, biased clips of this type cannot be used for joining panels of such a small thickness as 3 mm. Normally, it is not possible to disassemble the floor panels without having access to their undersides. This known technology relying on clips suffers from the additional drawbacks:

- Subsequent adjustment of the panels in their longitudinal direction is a complicated operation in con-

nection with laying, since the clips urge the panels tightly against each other.

- Floor laying using clips is time-consuming.
- This technique is usable only in those cases where
5 the floor panels are resting on underlying joists with the clips placed therebetween. For thin floors to be laid on a continuous, flat supporting structure, such clips cannot be used.
- The floor panels can be joined together only at
10 their long sides. No clip connection is provided on the short sides.

Technical Problems and Objects of the Invention

15 A main object of the invention therefore is to provide a system for joining together building panels, especially floor panels for hard, floating floors, which allows using floor panels of a smaller overall thickness than present-day floor panels.

20 A particular object of the invention is to provide a panel-joining system which

- makes it possible in a simple, cheap and rational way to provide a joint between floor panels without requiring the use of glue, especially a joint based primarily only on mechanical connections between the
25 panels;
- can be used for joining floor panels which have a smaller thickness than present-day laminated floors and which have, because of the use of a different core material, superior properties than present-day
30 floors even at a thickness of 3 mm;
- makes it possible between thin floor panels to provide a joint that eliminates any unevennesses in the joint because of thickness tolerances of the panels;
- allows joining all the edges of the panels;
- 35 - reduces tool wear when manufacturing floor panels with hard surface layers;

- allows repeated disassembly and reassembly of a floor previously laid, without causing damage to the panels, while ensuring high laying quality;
- makes it possible to provide moisture-proof floors;
- 5 - makes it possible to obviate the need of accurate, separate placement of an underlay before laying the floor panels; and
- considerably cuts the time for joining the panels.

These and other objects of the invention are achieved by means of a panel-joining system having the features recited in the appended claims.

Thus, the invention provides a system for making a joint along adjacent joint edges of two building panels, especially floor panels, in which joint:

15 the adjacent joint edges together form a first mechanical connection locking the joint edges to each other in a first direction at right angles to the principal plane of the panels, and

a locking device arranged on the rear side of the panels forms a second mechanical connection locking the panels to each other in a second direction parallel to the principal plane and at right angles to the joint edges, said locking device comprising a locking groove which extends parallel to and spaced from the joint edge of one of said panels, termed groove panel, and which is open at the rear side of the groove panel, said system being characterised in

that the locking device further comprises a strip integrated with the other of said panels, termed strip panel, said strip extending throughout substantially the entire length of the joint edge of the strip panel and being provided with a locking element projecting from the strip, such that when the panels are joined together, the strip projects on the rear side of the groove panel with its locking element received in the locking groove of the groove panel,

that the panels, when joined together, can occupy a relative position in said second direction where a play exists between the locking groove and a locking surface on the locking element that is facing the joint edges and
5 is operative in said second mechanical connection,

that the first and the second mechanical connection both allow mutual displacement of the panels in the direction of the joint edges, and

that the second mechanical connection is so conceived as to allow the locking element to leave the locking
10 groove if the groove panel is turned about its joint edge angularly away from the strip.

The term "rear side" as used above should be considered to comprise any side of the panel located behind/
15 underneath the front side of the panel. The opening plane of the locking groove of the groove panel can thus be located at a distance from the rear surface of the panel resting on the supporting structure. Moreover, the strip, which in the invention extends throughout substantially
20 the entire length of the joint edge of the strip panel, should be considered to encompass both the case where the strip is a continuous, uninterrupted element, and the case where the "strip" consists in its longitudinal direction of several parts, together covering the main
25 portion of the joint edge.

It should also be noted (i) that it is the first and the second mechanical connection as such that permit mutual displacement of the panels in the direction of the joint edges, and that (ii) it is the second mechanical
30 connection as such that permits the locking element to leave the locking groove if the groove panel is turned about its joint edge angularly away from the strip. Within the scope of the invention, there may thus exist means, such as glue and mechanical devices, that can
35 counteract or prevent such displacement and/or upward angling.

The system according to the invention makes it possible to provide concealed, precise locking of both the short and long sides of the panels in hard, thin floors. The floor panels can be quickly and conveniently dis-
5 assembled in the reverse order of laying without any risk of damage to the panels, ensuring at the same time a high laying quality. The panels can be assembled and dis-
assembled much faster than in present-day systems, and any damaged or worn-out panels can be replaced by taking
10 up and re-laying parts of the floor.

According to an especially preferred embodiment of the invention, a system is provided which permits precise joining of thin floor panels having, for example, a
thickness of the order of 3 mm and which at the same time
15 provides a tolerance-independent smooth top face at the joint. To this end, the strip is mounted in an equalising groove which is countersunk in the rear side of the strip panel and which exhibits an exact, predetermined distance
from its bottom to the front side of the strip panel. The
20 part of the strip projecting behind the groove panel engages a corresponding equalising groove, which is countersunk in the rear side of the groove panel and which exhibits the same exact, predetermined distance
from its bottom to the front side of the groove panel.
25 The thickness of the strip then is at least so great that the rear side of the strip is flush with, and preferably projects slightly below the rear side of the panels. In this embodiment, the panels will always rest, in the joint, with their equalising grooves on a strip. This
30 levels out the tolerance and imparts the necessary strength to the joint. The strip transmits horizontal and upwardly-directed forces to the panels and downwardly-directed forces to the existing subfloor.

Preferably, the strip may consist of a material
35 which is flexible, resilient and strong, and can be sawn. A preferred strip material is sheet aluminium. In an

aluminium strip, sufficient strength can be achieved with a strip thickness of the order of 0.5 mm.

In order to permit taking up previously laid, joined floor panels in a simple way, a preferred embodiment of the invention is characterised in that when the groove panel is pressed against the strip panel in the second direction and is turned angularly away from the strip, the maximum distance between the axis of rotation of the groove panel and the locking surface of the locking groove closest to the joint edges is such that the locking element can leave the locking groove without contacting the locking surface of the locking groove. Such a disassembly can be achieved even if the aforementioned play between the locking groove and the locking surface is not greater than 0.2 mm.

According to the invention, the locking surface of the locking element is able to provide a sufficient locking function even with very small heights of the locking surface. Efficient locking of 3-mm floor panels can be achieved with a locking surface that is as low as 2 mm. Even a 0.5-mm-high locking surface may provide sufficient locking. The term "locking surface" as used herein relates to the part of the locking element engaging the locking groove to form the second mechanical connection.

For optimal function of the invention, the strip and the locking element should be formed on the strip panel with high precision. Especially, the locking surface of the locking element should be located at an exact distance from the joint edge of the strip panel.

Furthermore, the extent of the engagement in the floor panels should be minimised, since it reduces the floor strength.

By known manufacturing methods, it is possible to produce a strip with a locking pin, for example by extruding aluminium or plastics into a suitable section, which is thereafter glued to the floor panel or is inserted in special grooves. These and all other tradi-

tional methods do however not ensure optimum function and an optimum level of economy. To produce the joint system according to the invention, the strip is suitably formed from sheet aluminium, and is mechanically fixed to the
5 strip panel.

The laying of the panels can be performed by first placing the strip panel on the subfloor and then moving the groove panel with its long side up to the long side of the strip panel, at an angle between the principal
10 plane of the groove panel and the subfloor. When the joint edges have been brought into engagement with each other to form the first mechanical connection, the groove panel is angled down so as to accommodate the locking element in the locking groove.

15 Laying can also be performed by first placing both the strip panel and the groove panel flat on the subfloor and then joining the panels parallel to their principal planes while bending the strip downwards until the locking element snaps up into the locking groove. This laying
20 technique enables in particular mechanical locking of both the short and long sides of the floor panels. For example, the long sides can be joined together by using the first laying technique with downward angling of the groove panel, while the short sides are subsequently
25 joined together by displacing the groove panel in its longitudinal direction until its short side is pressed on and locked to the short side of an adjacent panel in the same row.

In connection with their manufacture, the floor
30 panels can be provided with an underlay of e.g. floor board, foam or felt. The underlay should preferably cover the strip such that the joint between the underlays is offset in relation to the joint between the floor panels.

The above and other features and advantages of the
35 invention will appear from the appended claims and the following description of embodiments of the invention.

The invention will now be described in more detail hereinbelow with reference to the accompanying drawing Figures.

5 Description of Drawing Figures

Figs 1a and 1b schematically show in two stages how two floor panels of different thickness are joined together in floating fashion according to a first embodiment of the invention.

10 Figs 2a-c show in three stages a method for mechanically joining two floor panels according to a second embodiment of the invention.

Figs 3a-c show in three stages another method for mechanically joining the floor panels of Figs 2a-c.

15 Figs 4a and 4b show a floor panel according to Figs 2a-c as seen from below and from above, respectively.

Fig. 5 illustrates in perspective a method for laying and joining floor panels according to a third embodiment of the invention.

20 Fig. 6 shows in perspective and from below a first variant for mounting a strip on a floor panel.

Fig. 7 shows in section a second variant for mounting a strip on a floor panel.

25 Description of Preferred Embodiments

Figs 1a and 1b, to which reference is now made, illustrate a first floor panel 1, hereinafter termed strip panel, and a second floor panel 2, hereinafter termed groove panel. The terms "strip panel" and "groove panel" are merely intended to facilitate the description of the invention, the panels 1, 2 normally being identical in practice. The panels 1 and 2 may be made from compact laminate and may have a thickness of about 3 mm with a thickness tolerance of about ± 0.2 mm. Considering
30 this thickness tolerance, the panels 1, 2 are illustrated
35 with different thicknesses (Fig. 1b), the strip panel 1

having a maximum thickness (3.2 mm) and the groove panel 2 having a minimum thickness (2.8 mm).

To enable mechanical joining of the panels 1, 2 at opposing joint edges, generally designated 3 and 4,

5 respectively, the panels are provided with grooves and strips as described in the following.

Reference is now made primarily to Figs 1a and 1b, and secondly to Figs 4a and 4b showing the basic design of the floor panels from below and from above, respectively.

From the joint edge 3 of the strip panel 1, i.e. the one long side, projects horizontally a flat strip 6 mounted at the factory on the underside of the strip panel 1 and extending throughout the entire joint edge 3.

15 The strip 6, which is made of flexible, resilient sheet aluminium, can be fixed mechanically, by means of glue or in any other suitable way. In Figs 1a and 1b, the strip 6 is glued, while in Figs 4a and 4b it is mounted by means of a mechanical connection, which will be described in

20 more detail hereinbelow.

Other strip materials can be used, such as sheets of other metals, as well as aluminium or plastics sections. Alternatively, the strip 6 may be integrally formed with the strip panel 1. At any rate, the strip 6 should be

25 integrated with the strip panel 1, i.e. it should not be mounted on the strip panel 1 in connection with laying. As a non-restrictive example, the strip 6 may have a width of about 30 mm and a thickness of about 0.5 mm.

As appears from Figs 4a and 4b, a similar, although

30 shorter strip 6' is provided also at one short side 3' of the strip panel 1. The shorter strip 6' does however not extend throughout the entire short side 3' but is otherwise identical with the strip 6 and, therefore, is not described in more detail here.

35 The edge of the strip 6 facing away from the joint edge 3 is formed with a locking element 8 extended throughout the entire strip 6. The locking element 8 has

a locking surface 10 facing the joint edge 3 and having a height of e.g. 0.5 mm. The locking element 8 is so designed that when the floor is being laid and the strip panel 2 of Fig. 1a is pressed with its joint edge 4 against the joint edge 3 of the strip panel 1 and is angled down against the subfloor 12 according to Fig. 1b, it enters a locking groove 14 formed in the underside 16 of the groove panel 2 and extending parallel to and spaced from the joint edge 4. In Fig. 1b, the locking element 8 and the locking groove 14 together form a mechanical connection locking the panels 1, 2 to each other in the direction designated D2. More specifically, the locking surface 10 of the locking element 8 serves as a stop with respect to the surface of the locking groove 14 closest to the joint edge 4.

When the panels 1 and 2 are joined together, they can however occupy such a relative position in the direction D2 that there is a small play Δ between the locking surface 10 and the locking groove 14. This mechanical connection in the direction D2 allows mutual displacement of the panels 1, 2 in the direction of the joint, which considerably facilitates the laying and enables joining together the short sides by snap action.

As appears from Figs 4a and 4b, each panel in the system has a strip 6 at one long side 3 and a locking groove 14 at the other long side 4, as well as a strip 6' at one short side 3' and a locking groove 14' at the other short side 4'.

Furthermore, the joint edge 3 of the strip panel 1 has in its underside 18 a recess 20 extending throughout the entire joint edge 3 and forming together with the upper face 22 of the strip 6 a laterally open recess 24. The joint edge 4 of the groove panel 2 has in its top side 26 a corresponding recess 28 forming a locking tongue 30 to be accommodated in the recess 24 so as to form a mechanical connection locking the joint edges 3, 4 to each other in the direction designated D1. This con-

nection can be achieved with other designs of the joint edges 3, 4, for example by a bevel thereof such that the joint edge 4 of the groove panel 2 passes obliquely in underneath the joint edge 3 of the strip panel 1 to be
5 locked between that edge and the strip 6.

The panels 1, 2 can be taken up in the reverse order of laying without causing any damage to the joint, and be laid again.

The strip 6 is mounted in a tolerance-equalising groove 40 in the underside 18 of the strip panel 1 adjacent the joint edge 3. In this embodiment, the width of the equalising groove 40 is approximately equal to half the width of the strip 6, i.e. about 15 mm. By means of the equalising groove 40, it is ensured that there will
10 always exist between the top side 21 of the panel 1 and the bottom of the groove 40 an exact, predetermined distance E which is slightly smaller than the minimum thickness (2.8 mm) of the floor panels 1, 2. The groove panel 2 has a corresponding tolerance-equalising surface
15 or groove 42 in the underside 16 of the joint edge 4. The distance between the equalising surface 42 and the top side 26 of the groove panel 2 is equal to the aforementioned exact distance E. Further, the thickness of the strip 6 is so chosen that the underside 44 of the strip
20 is situated slightly below the undersides 18 and 16 of the floor panels 1 and 2, respectively. In this manner, the entire joint will rest on the strip 6, and all vertical downwardly-directed forces will be efficiently transmitted to the subfloor 12 without any stresses being
25 exerted on the joint edges 3, 4. Thanks to the provision of the equalising grooves 40, 42, an entirely even joint will be achieved on the top side, despite the thickness tolerances of the panels 1, 2, without having to perform any grinding or the like across the whole panels.
30 Especially, this obviates the risk of damage to the bottom layer of the compact laminate, which might give rise to bulging of the panels.
35

Reference is now made to the embodiment of Figs 2a-c showing in a succession substantially the same laying method as in Figs 1a and 1b. The embodiment of Figs 2a-c primarily differs from the embodiment of Figs 1a and 1b in that the strip 6 is mounted on the strip panel 1 by means of a mechanical connection instead of glue. To provide this mechanical connection, illustrated in more detail in Fig. 6, a groove 50 is provided in the underside 18 of the strip panel 1 at a distance from the recess 24. The groove 50 may be formed either as a continuous groove extending throughout the entire length of the panel 1, or as a number of separate grooves. The groove 50 defines, together with the recess 24, a dovetail gripping edge 52, the underside of which exhibits an exact equalising distance E to the top side 21 of the strip panel 1. The aluminium strip 6 has a number of punched and bent tongues 54, as well as one or more lips 56 which are bent round opposite sides of the gripping edge 52 in clamping engagement therewith. This connection is shown in detail from below in the perspective view of Fig. 6.

Alternatively, a mechanical connection between the strip 6 and the strip panel 1 can be provided as illustrated in Fig. 7 showing in section a cut-away part of the strip panel 1 turned upside down. In Fig. 7, the mechanical connection comprises a dovetail recess 58 in the underside 18 of the strip panel 1, as well as tongues/lips 60 punched and bent from the strip 6 and clamping against opposing inner sides of the recess 58.

The embodiment of Figs 2a-c is further characterised in that the locking element 8 of the strip 6 is designed as a component bent from the aluminium sheet and having an operative locking surface 10 extending at right angles up from the front side 22 of the strip 6 through a height of e.g. 0.5 mm, and a rounded guide surface 34 facilitating the insertion of the locking element 8 into the locking groove 14 when angling down the groove panel 2

towards the subfloor 12 (Fig. 2b), as well as a portion 36 which is inclined towards the subfloor 12 and which is not operative in the laying method illustrated in Figs 2a-c.

5 Further, it can be seen from Figs 2a-c that the joint edge 3 of the strip panel 1 has a lower bevel 70 which cooperates during laying with a corresponding upper bevel 72 of the joint edge 4 of the groove panel 2, such that the panels 1 and 2 are forced to move vertically
10 towards each other when their joint edges 3, 4 are moved up to each other and the panels are pressed together horizontally.

Preferably, the locking surface 10 is so located relative to the joint edge 3 that when the groove panel
15 2, starting from the joined position in Fig. 2c, is pressed horizontally in the direction D2 against the strip panel 1 and is turned angularly up from the strip 6, the maximum distance between the axis of rotation A of the groove panel 2 and the locking surface 10 of the
20 locking groove is such that the locking element 8 can leave the locking groove 14 without coming into contact with it.

Figs 3a-3b show another joining method for mechanically joining together the floor panels of Figs 2a-c. The
25 method illustrated in Figs 3a-c relies on the fact that the strip 6 is resilient and is especially useful for joining together the short sides of floor panels which have already been joined along one long side as illustrated in Figs 2a-c. The method of Figs 3a-c is per-
30 formed by first placing the two panels 1 and 2 flat on the subfloor 12 and then moving them horizontally towards each other according to Fig. 3b. The inclined portion 36 of the locking element 8 then serves as a guide surface which guides the joint edge 4 of the groove panel 2 up on
35 to the upper side 22 of the strip 6. The strip 6 will then be urged downwards while the locking element 8 is sliding on the equalising surface 42. When the joint

edges 3, 4 have been brought into complete engagement with each other horizontally, the locking element 8 will snap into the locking groove 14 (Fig. 3c), thereby providing the same locking as in Fig. 2c. The same
5 locking method can also be used by placing, in the initial position, the joint edge 4 of the groove panel with the equalising groove 42 on the locking element 10 (Fig. 3a). The inclined portion 36 of the locking element 10 then is not operative. This technique thus makes it
10 possible to lock the floor panels mechanically in all directions, and by repeating the laying operations the whole floor can be laid without using any glue.

The invention is not restricted to the preferred embodiments described above and illustrated in the drawings, but several variants and modifications thereof are conceivable within the scope of the appended claims. The
15 strip 6 can be divided into small sections covering the major part of the joint length. Further, the thickness of the strip 6 may vary throughout its width. All strips, locking grooves, locking elements and recesses are so
20 dimensioned as to enable laying the floor panels with flat top sides in a manner to rest on the strip 6 in the joint. If the floor panels consist of compact laminate and if silicone or any other sealing compound, a rubber strip or any other sealing device is applied prior to
25 laying between the flat projecting part of the strip 6 and the groove panel 2 and/or in the recess 26, a moisture-proof floor is obtained.

As appears from Fig. 6, an underlay 46, e.g. of
30 floor board, foam or felt, can be mounted on the underside of the panels during the manufacture thereof. In one embodiment, the underlay 46 covers the strip 6 up to the locking element 8, such that the joint between the underlays 46 becomes offset in relation to the joint between
35 the joint edges 3 and 4.

In the embodiment of Fig. 5, the strip 6 and its locking element 8 are integrally formed with the strip

panel 1, the projecting part of the strip 6 thus forming an extension of the lower part of the joint edge 3. The locking function is the same as in the embodiments described above. On the underside 18 of the strip panel 1, there is provided a separate strip, band or the like 74 extending throughout the entire length of the joint and having, in this embodiment, a width covering approximately the same surface as the separate strip 6 of the previous embodiments. The strip 74 can be provided directly on the rear side 18 or in a recess formed therein (not shown), so that the distance from the front side 21, 26 of the floor to the rear side 76, including the thickness of the strip 74, always is at least equal to the corresponding distance in the panel having the greatest thickness tolerance. The panels 1, 2 will then rest, in the joint, on the strip 74 or only on the undersides 18, 16 of the panels, if these sides are made plane.

When using a material which does not permit downward bending of the strip 6 or the locking element 8, laying can be performed in the way shown in Fig. 5. A floor panel 2a is moved angled upwardly with its long side 4a into engagement with the long side 3 of a previously laid floor panel 1 while at the same time a third floor panel 2b is moved with its short side 4b' into engagement with the short side 3a' of the upwardly-angled floor panel 2a and is fastened by angling the panel 2b downwards. The panel 2b is then pushed along the short side 3a' of the upwardly-angled floor panel 2a until its long side 4b encounters the long side 3 of the initially-laid panel 1. The two upwardly-angled panels 2a and 2b are therefore angled down on to the subfloor 12 so as to bring about locking.

By a reverse procedure the panels can be taken up in the reverse order of laying without causing any damage to the joint, and be laid again.

Several variants of preferred laying methods are conceivable. For example, the strip panel can be inserted under the groove panel, thus enabling the laying of panels in all four directions with respect to the initial position.

CLAIMS

1. A system for providing a joint along adjacent
5 joint edges (3, 4) of two building panels (1, 2), especially floor panels, in which joint:

the adjacent joint edges (3, 4) together form a first mechanical connection locking the joint edges (3, 4) to each other in a first direction (D1) at right
10 angles to the principal plane of the panels (1, 2), and a locking device (6, 8, 14) arranged on the rear side (18, 16) of the panels (1, 2) forms a second mechanical connection locking the panels (1, 2) to each other in a second direction (D2) parallel to the principal
15 plane and at right angles to the joint edges (3, 4), said locking device (6, 8, 14) comprising a locking groove (14) which extends parallel to and spaced from the joint edge (4) of one (2) of said panels, termed groove panel, and which is open at the rear side (16) of the groove
20 panel (2), characterised in

that the locking device (6, 8, 14) further comprises a strip (6) integrated with the other (1) of said panels, termed strip panel, said strip (6) extending throughout substantially the entire length of the joint edge (3) of
25 the strip panel (1) and being provided with a locking element (8) projecting from the strip, such that when the panels are joined together, the strip (6) projects on the rear side of the groove panel (2) with its locking element (8) received in the locking groove (14) of the
30 groove panel (2),

that the panels, when joined together, can occupy a relative position in said second direction (D2) where a play (Δ) exists between the locking groove (14) and a locking surface (10) on the locking element (8) that is
35 facing the joint edges and is operative in said second mechanical connection,

that the first and the second mechanical connection both allow mutual displacement of the panels (1, 2) in the direction of the joint edges (3, 4), and

that the second mechanical connection is so conceived as to allow the locking element (8) to leave the locking groove (14) if the groove panel (2) is turned about its joint edge (4) angularly away from the strip (6).

2. A system as claimed in claim 1, characterised in that when the groove panel (2) is pressed against the strip panel (1) in said second direction (D2) and is turned angularly away from the strip (6), the maximum distance between the axis of rotation of the groove panel (2) and the locking surface of the locking groove (14) closest to the joint edges is such that the locking element (8) can leave the locking groove (14) without contacting the locking surface of the locking groove (14).

3. A system as claimed in claim 1 or 2, characterised in that the locking surface (10) of the locking element (8) is extended from the front side (22) of the strip (6) through a height in said first direction that is less than or equal to 2 mm.

4. A system as claimed in any one of the preceding claims, characterised in that the first mechanical connection is provided by the joint edge (4) of the groove panel (2) engaging, in said first direction, between the joint edge (3) of the strip panel (1) and the front side of the strip (6).

5. A system as claimed in any one of the preceding claims, characterised in that the strip (6) integrated with the strip panel (1) is made of a material different from that of the strip panel (1) and fixedly mounted on the strip panel (1) at the factory.

6. A system as claimed in claim 5, characterised in that the strip (6), at least for one of the two panels (1, 2), is received in a countersunk

groove (40; 42) in the rear side (18; 16) of this one panel (1; 2).

7. A system as claimed in claim 5 or 6, c h a r -
a c t e r i s e d i n

5 that the strip (6) is mounted in an equalising
groove (40) which is countersunk in the rear side (18) of
the strip panel (1) and exhibits an exact, predetermined
distance (E) from its bottom to the front side (21) of
the strip panel (1),

10 that the part of the strip (6) projecting behind
the groove panel (2) engages a corresponding equalising
groove (42) which is countersunk in the rear side (16) of
the groove panel (2) and which exhibits the same exact,
predetermined distance (E) from its bottom to the front
15 side (26) of the groove panel (2), and

that the strip (6) has at least such a thickness
that the rear side (44) of the strip is flush with the
rear sides (18, 16) of the panels.

8. A system as claimed in claim 7, c h a r a c -
20 t e r i s e d i n that the strip (6) has such a thickness
that it is only partly received in the equalising grooves
(40, 42).

9. A system as claimed in any one of claims 5-8,
c h a r a c t e r i s e d i n that the strip (6) is fixed
25 to the strip panel (1) by means of a mechanical connec-
tion.

10. A system as claimed in claim 6, c h a r a c -
t e r i s e d i n that the mechanical connection between
the strip (6) and the strip panel (1) comprises a grip-
30 ping edge (52) defined by two recesses (24, 50) in the
rear side (18) of the strip panel, and tongues, lips or
the like (54, 56) which are bent or punched from the
strip (6) and which press against opposite outer sides of
the gripping edge (52).

35 11. A system as claimed in claim 6, c h a r a c -
t e r i s e d i n that the mechanical connection between
the strip (6) and the strip panel (1) comprises a recess

(58) in the rear side (18) of the strip panel, and tongues, lips or the like (60) which are bent or punched from the strip (6) and which press against opposing inner sides of the recess (58).

5 12. A system as claimed in any one of claims 5-11, characterised in that the strip (6) is fixed to the strip panel (1) by means of a binder.

10 13. A system as claimed in any one of claims 5-12, characterised in that the strip (6) is made of a flexible, preferably resilient material, such as sheet aluminium.

15 14. A system as claimed in any one of the preceding claims, characterised in that the locking element (8) consists of a locking edge extended continuously along the strip (6).

15 15. A system as claimed in any one of claims 1-13, characterised in that the locking element (8) consists of a plurality of spaced-apart locking elements distributed throughout the length of the strip (6).

20 16. A system as claimed in any one of the preceding claims, characterised in that the panels (1, 2) are rectangular and intended, at each of their four edges (3, 4, 3', 4'), to be joined to a similar panel by a first mechanical connection of the aforementioned type and a second mechanical connection of the aforementioned type, each panel having a first pair of opposite joint edges (3, 4), one of which is provided with a strip (6) of the aforementioned type and the other of which is provided with a locking groove (14) of the aforementioned type, and a second pair of opposite joint edges (3', 4'), one of which is provided with a strip (6') of the aforementioned type and the other of which is provided with a locking groove (14') of the aforementioned type.

30 17. A system as claimed in any one of the preceding claims, characterised in that an underlay (46) of floor boards, foam, felt or the like is fixed to the rear sides (18, 16) of the panels.

18. A system as claimed in claim 17, characterised in that the underlay (46) is fixed so as to cover the strip (6) in said second direction at least up to the locking element (8), such that a joint between the underlays (46) of the two adjacent panels is offset in said second direction relative to the joint edges (3, 4).

19. A system as claimed in any one of the preceding claims, characterised in that a sealing means, such as a sealing compound, a rubber strip or the like, is provided on the front side (22) of the strip between the locking element (8) and the joint edge (3) of the strip panel to seal against the groove panel (2).

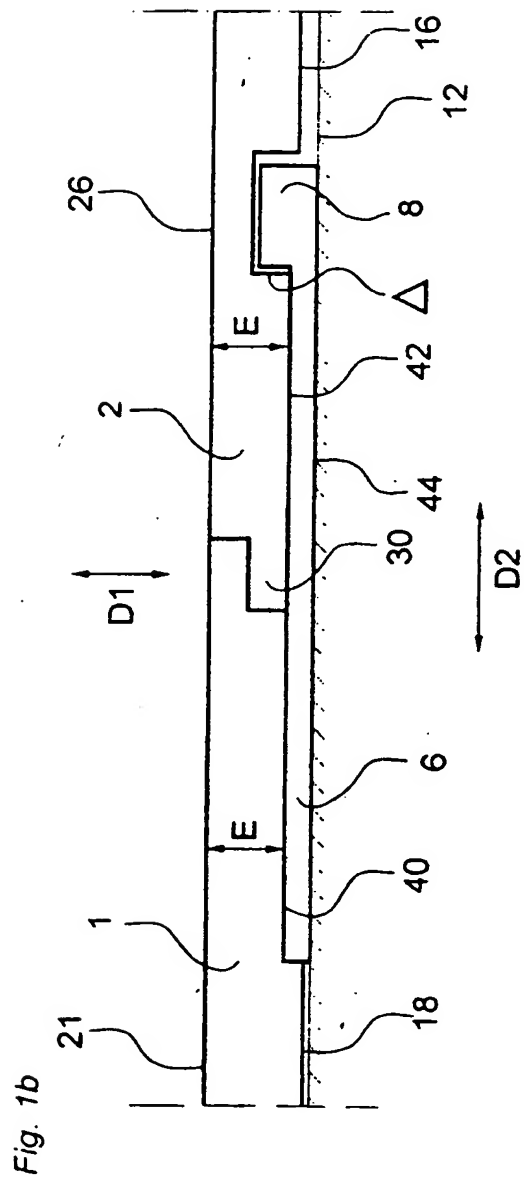
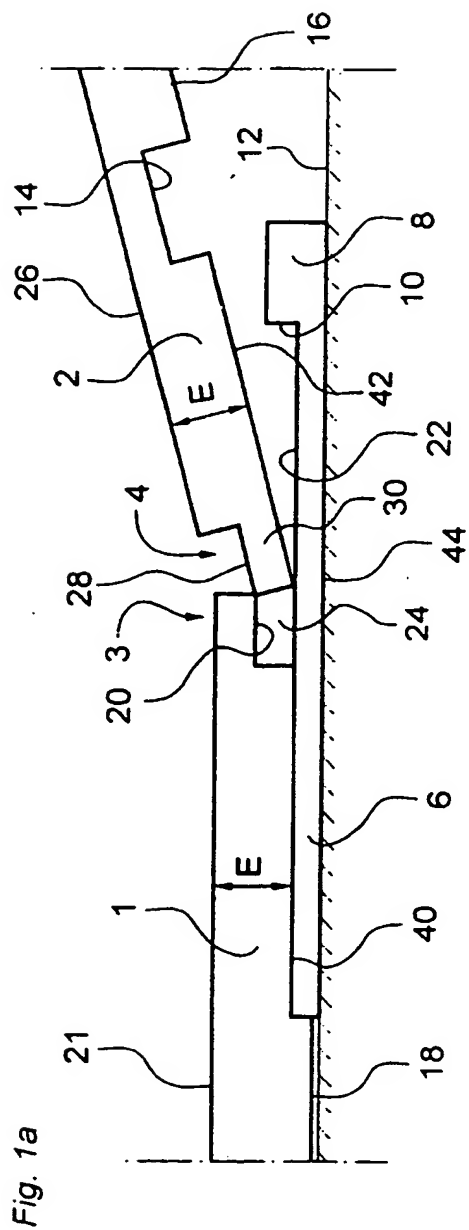


Fig. 2a

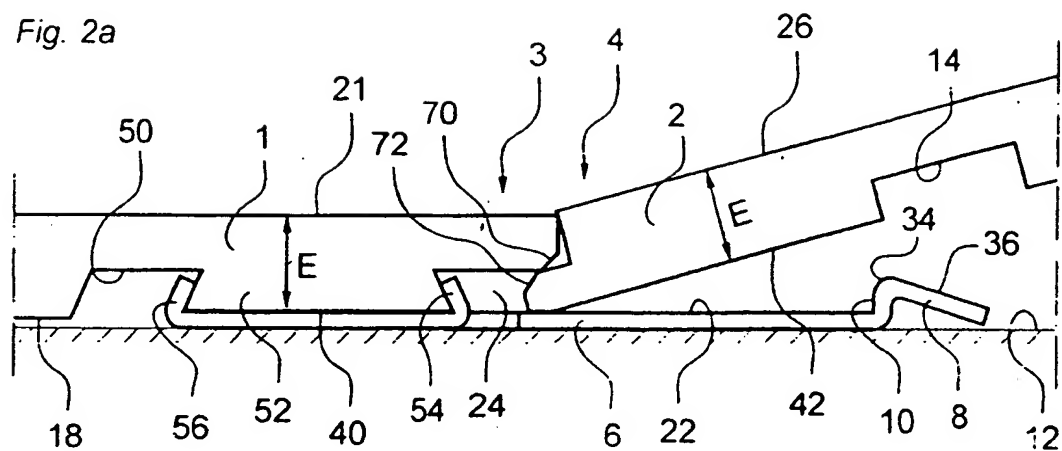


Fig. 2b

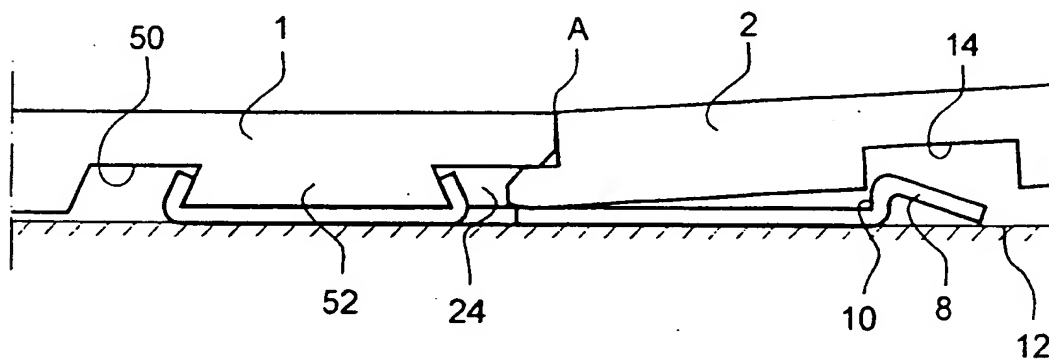


Fig. 2c

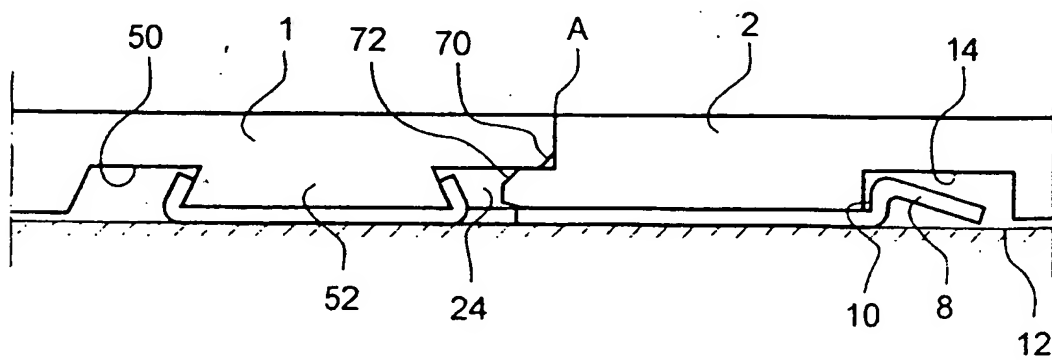


Fig. 3a

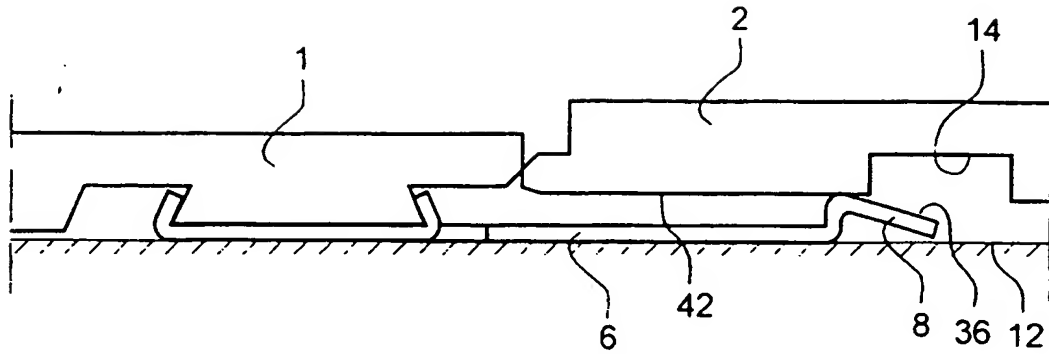


Fig. 3b

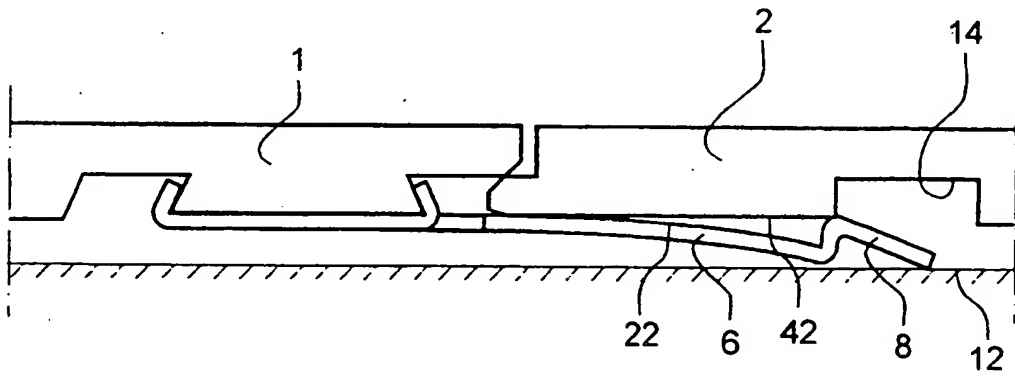


Fig. 3c

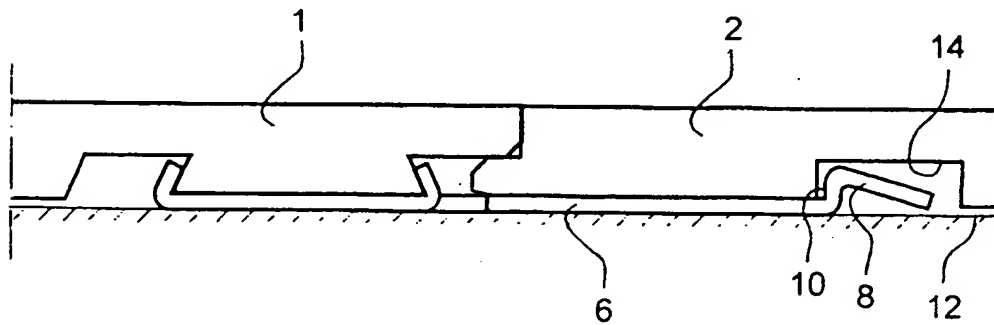


Fig. 4a



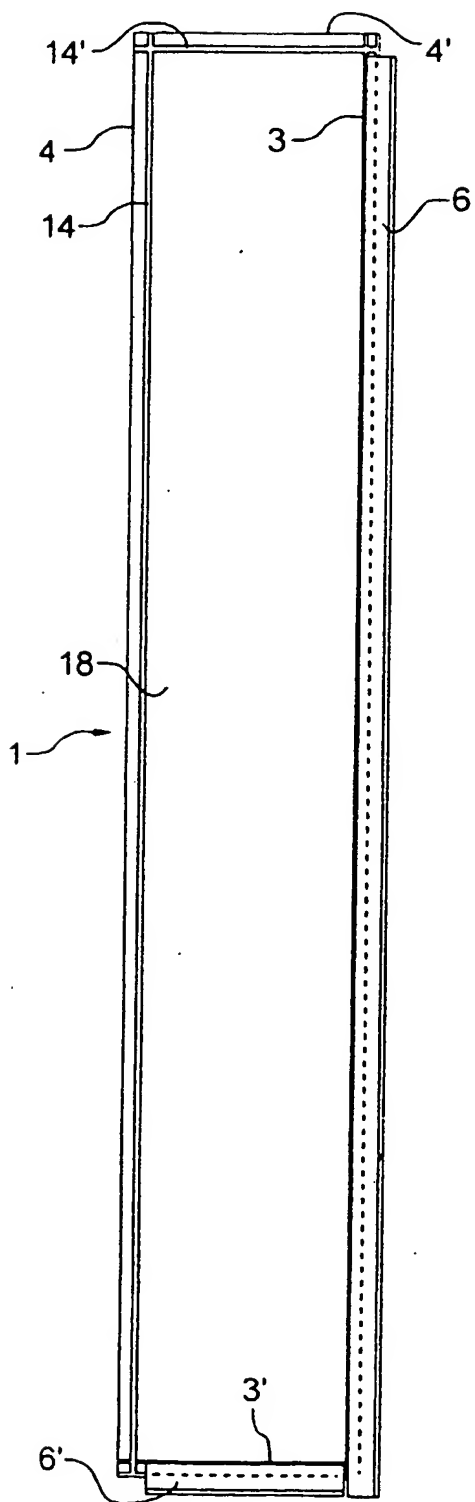


Fig. 4b

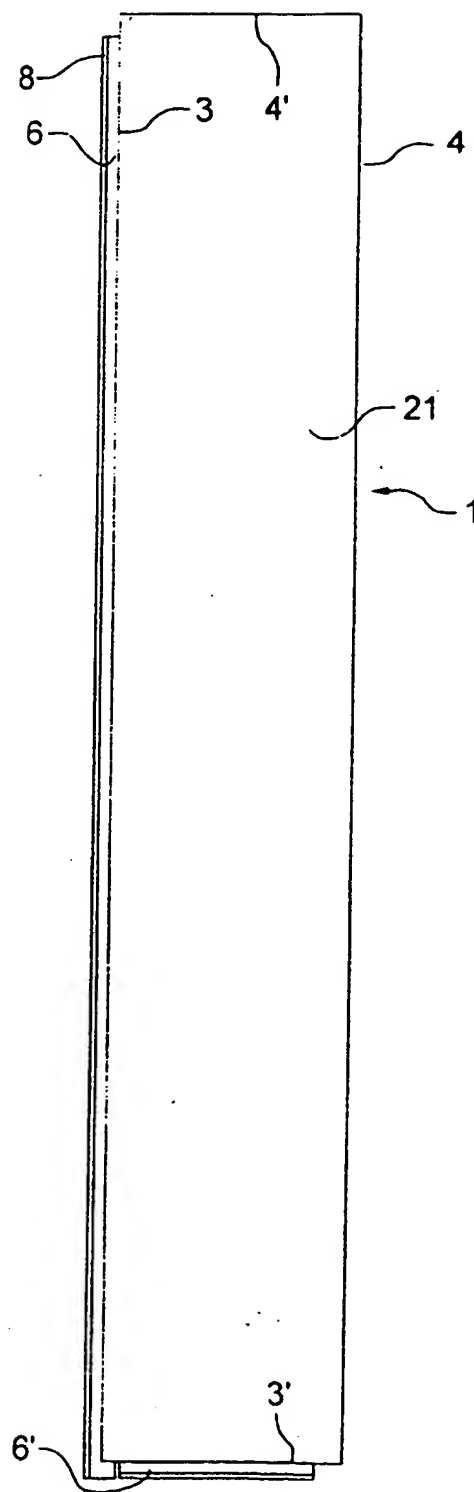

5/6

Fig. 5

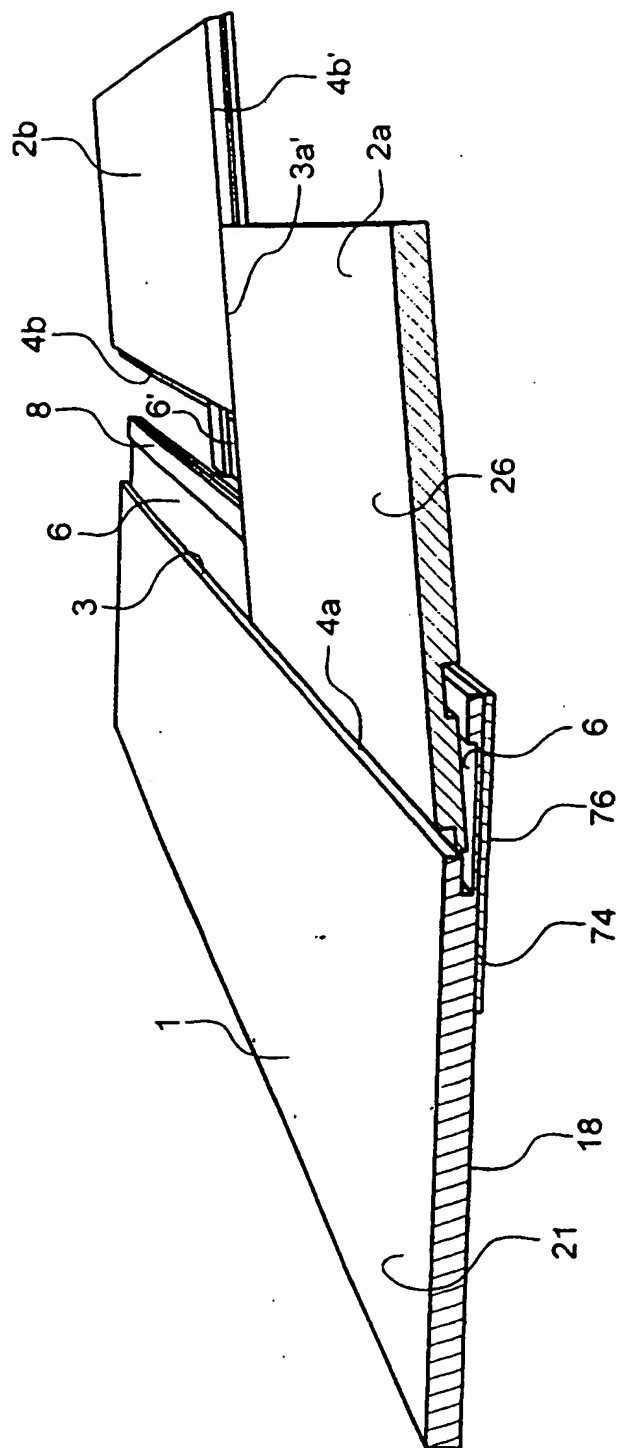

6/6

Fig. 6


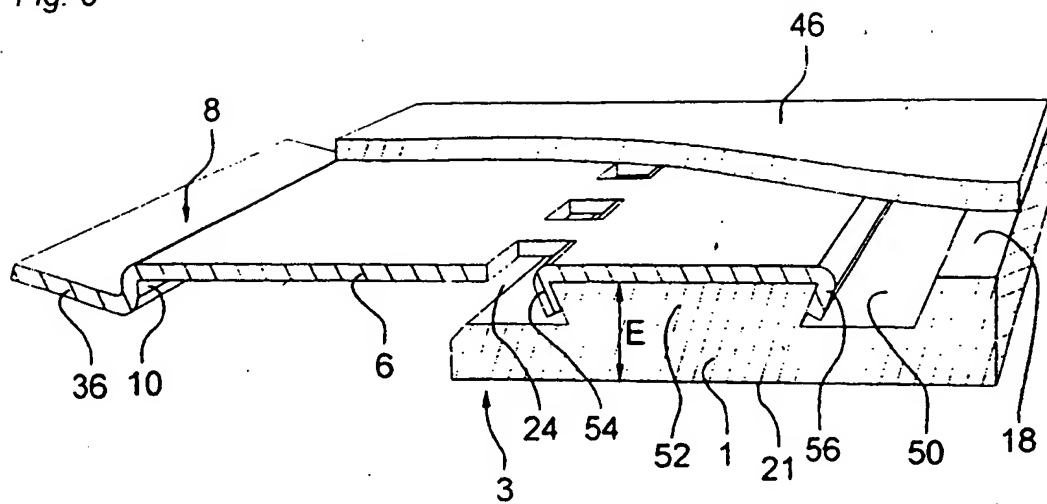


Fig. 7

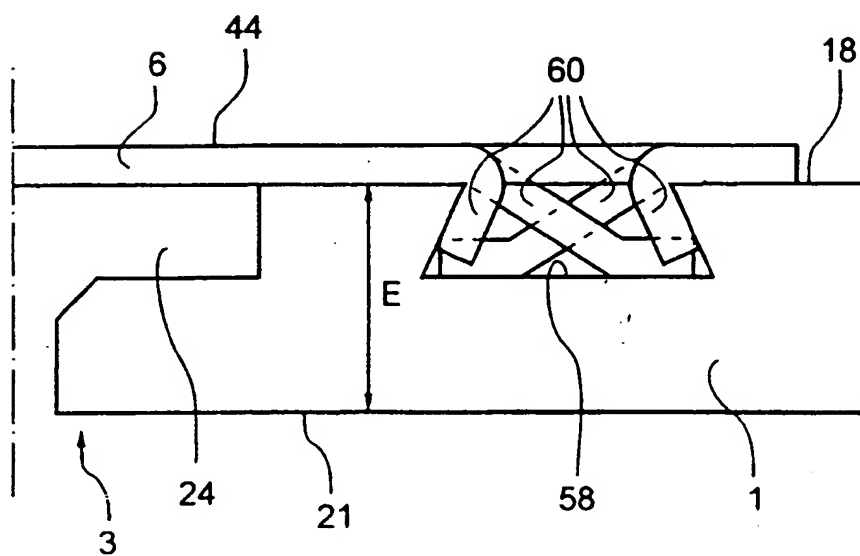

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 94/00386

A. CLASSIFICATION OF SUBJECT MATTER

IPC5: E04F 15/14, E04F 15/02, E04F 13/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: E04F, A47G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	WO, A1, 9313280 (JUNCKERS INDUSTRIER A/S), 8 July 1993 (08.07.93), abstract, details 1,2,3,14 --	1-19
A	US, A, 3538665 (P. GOHNER), 10 November 1970 (10.11.70), details 7,9 --	1-19
A	DE, A1, 2616077 (HEWENER, H.J.), 27 October 1977 (27.10.77), figure 1 --	1-19

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

- * Special categories of cited documents
- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

* "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

* "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

* "&" document member of the same patent family

Date of the actual completion of the international search

7 July 1994

Date of mailing of the international search report

10 -08- 1994

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Örjan Nylund
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 94/00386

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR, A, 1293043 (ETABLISSEMENTS PIRAUD PLASTIQUES), 2 April 1962 (02.04.62), figure 2, details 8,9,10, 11 -- -----	1-19

INTERNATIONAL SEARCH REPORT
Information on patent family members

28/05/94

International application No.

PCT/SE 94/00386

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A1- 9313280	08/07/93	NONE	
US-A- 3538665	10/11/70	NONE	
DE-A1- 2616077	27/10/77	NONE	
FR-A- 1293043	02/04/62	NONE	

AWAPATENT AB

HELSINGBORG
20 Feb 1995

Our ref.
2950767

Handled by
Sören Giver/MY

Att.
Cash & Accounts Dep.

REKOMMENDERAS

DEBIT ORDER

European Patent Office
D-80298 München
Tyskland

Deposit account No. 2810.0022
Account holder: AWAPATENT AB

Re: European Patent Application No. 94915725.9
(International Application (IA-PCT) No. PCT/SE94/00386
Applicant(s): VÄLINGE ALUMINIUM AB

Please debit our deposit account with the items indicated below

<u>EPC; New application</u>		
Filing fee	() 100% () 80%	
Search fee		
Designation fee		
Fee for add. claims		
Fee for add. copy of ref.		
<u>EURO-PCT; Regional phase</u>		
National fee		600,-
Search fee	() 80% (x) 0%	
Designation fee	16 x 350,-	5600,-
Fee for add. claims	9 x 80,-	720,-
Fee for add. copy of ref.		

Examination fee	() 100% (x) 80%	2240,-
Grant fee		
Others:		
	TOTAL (DM)	9160,-

AWAPATENT AB

.....
/Arthur Berglund/

Please return the enclosed
acknowledgement copy

Malmö (Head office)

Street address: Bellevuevägen 46
Postal address: Box 5117
Malmö S-200 71 Malmö

Telex 32407
Telephone +46 40 985100
Fax +46 40 260516

Other AFA offices:

LUND GÖTEBORG
HELSINGBORG STOCKHOLM
VÄXJÖ SÖDERHAMN

VOLLMACHT¹ / AUTHORIZATION¹ / POUVOIR¹

Bitte vor dem Ausfüllen des Formblatts die Bemerkungen lesen
Please read the notes before completing the form
Veuillez lire les remarques avant de remplir le formulaire

Nr. der Anmeldung (des Patents) / Application/Patent No. /
N° de la demande (du brevet)

Zeichen des (der) Vertreters (Vertreter) (max. 15 Positionen)
Representative's Reference (max. 15 spaces)
Référence du (des) mandataire(s) (15 caractères ou espaces
au maximum)

2950767

Ich (Wir) / I (We) / Je (Nous)²

VÄLINGE ALUMINIUM AB
Vångavägen 48
S-260 40 VIKEN
Sweden

bevollmächtigte(n) hiermit / do hereby authorize / autorise (autorisons) par la présente³ anyone of ANDERSSON, Per-Olof;
BERGLUND, Arthur; BJERRE, Nils; LENZ, Franz; PERKLEV, Cecilia; ROSTOVANYI, Peter; THYLEN, Eva;
WALLIN, Bo-Göran; WIKLUND, Erik; WIKLUND, Ingrid;
all with address AWAPATENT AB, Box 5117, S-200 71 MALMÖ, SWEDEN
ALM, Agneta; BURMAN, Tore; ELLNER, Lars; HENNINGSSON, Gunnar; HOLMGREN, Hans; LARSSON, Kjell;
ONN, Christer; STÜRMER, Gert; all with address AWAPATENT AB, Box 45086, S-104 30 STOCKHOLM, SWEDEN
FERKINGHOFF, Claes-Göran; FRANZEN, Lars; LINDBERG, Bo; RUDENIUS, Arne;
all with address AWAPATENT AB, Box 11394, S-404 28 GÖTEBORG, SWEDEN

☐ (weitere Vertreter sind auf einem gesonderten Blatt angegeben. / Additional representatives indicated on supplementary sheet. /
Les autres mandataires sont mentionnés sur une feuille supplémentaire.)

mich (uns) zu vertreten als / to represent me (us) as / à me (nous) représenter en tant que

☒ Anmelder oder Patentinhaber / applicant(s) or patent proprietor(s) / déposant(s) ou titulaire(s) du brevet.

☐ Einsprechenden (Einsprechende) / opponent(s) / opposant(s).

für mich (uns) zu handeln in den durch das Europäische Patentübereinkommen geschaffenen Verfahren in Sachen der europäischen
Patentanmeldung(en) oder des (der) europäischen Patents (Patente)⁴ / to act for me (us) in all proceedings established by the European
Patent Convention concerning the European patent application(s) or patent(s)⁴ / à agir en mon (notre) nom dans toute procédure instituée
par la Convention sur le brevet européen et concernant la (les) demande(s) de brevet européen ou le (les) brevet(s) européen(s)⁴

SYSTEM FOR JOINING BUILDING PANELS

☐ (Weitere Anmeldungen oder Patente sind auf einem gesonderten Blatt angegeben. / Additional applications or patents indicated on
supplementary sheet. / Les autres demandes ou brevets sont mentionnés sur une feuille supplémentaire.)

und Zahlungen für mich (uns) in Empfang zu nehmen. / and to receive payments on my (our) behalf. / et à recevoir des paiements en mon
(notre) nom.

☒ Diese Vollmacht gilt gleichermaßen für Verfahren nach dem Vertrag über die internationale Zusammenarbeit auf dem Gebiet des
Patentwesens. / This authorisation applies likewise to any proceedings under the Patent Cooperation Treaty. / Le présent pouvoir
s'applique également dans les mêmes limites à toute procédure instituée par le Traité sur la coopération en matière de brevets.

☒ Diese Vollmacht gilt auch für eventuelle europäische Teilanmeldungen. / This authorisation also covers any European divisional
applications. / Le présent pouvoir vaut également pour les demandes divisionnaires européennes qui pourraient être déposées.

☒ Untervollmacht kann erteilt werden. / Sub-authorisation may be given. / Le pouvoir pourra être délégué.

☐ Ich (Wir) widerrufe(n) hiermit frühere Vollmachten in Sachen der obenbezeichneten Anmeldung(en) oder des obenbezeichneten Patents
(der obenbezeichneten Patente).⁵ / I (We) hereby revoke all previous authorisations in respect of the above application(s) or patent(s).⁵ /
Je révoque (Nous révoquons) par la présente tout pouvoir antérieur, donné pour la (les) demande(s) ou le (les) brevet(s) mentionné(s)
ci-dessus.⁵

Ort / Place / Lieu

Viken

Datum / Date

95-02-09

Unterschrift(en) / Signature(s)⁶

VÄLINGE ALUMINIUM AB

Danko Peruvian / *DANKO PERUVIAN, Managing Director.*

Das Formblatt muß vom (von den) Anmelder(n) (bei juristischen Personen vom Unterschriftsberechtigten) eigenhändig unterzeichnet sein. Nach der
Unterschrift bitte den (die) Namen des (der) Unterzeichneten mit Schreibmaschine wiederholen (bei juristischen Personen die Stellung des Unterschrifts-
berechtigten innerhalb der Gesellschaft angeben).

The form must bear the personal signature(s) of the applicant(s) (in the case of legal persons, that of the officer empowered to sign). After the signature,
please type the name(s) of the signatory(ies) adding, in the case of legal persons, his (their) position within the company.

Le formulaire doit porter la (les) signature(s) personnelle(s) du (des) demandeur(s) (dans le cas de personnes morales, celle du responsable compétent pour
signer). Veuillez ajouter à la machine, après la signature, le (les) nom(s) du (des) signataire(s) en mentionnant, dans le cas de personnes morales, ses (leurs)
fonctions au sein de la société.

ERFINDERNENNUNG / DESIGNATION OF INVENTOR / DESIGNATION DE L'INVENTEUR

(falls Anmelder nicht oder nicht allein der Erfinder ist) / (where the applicant is not the inventor or is not the sole inventor) / (si demandeur n'est pas l'inventeur ou l'unique inventeur)

Nr. der Anmeldung / Application N° / N° de la demande

Zeichen des (der) Anmelders (Anmelder) oder Vertreters (Vertreter) (max. 15 Positionen)
Applicant's or Representative's Reference (max. 15 spaces)
Référence du (des) demandeur(s) ou du (des) mandataire(s)
(15 caractères au maximum)

2950767

In Sachen der europäischen Patentanmeldung (Bezeichnung der Erfindung)
In respect of the European patent application (title of the invention)
En ce qui concerne la demande de brevet européen (Titre de l'invention)

SYSTEM FOR JOINING BUILDING PANELS

nennt (nennen) der (die) Unterzeichnete(n)¹
I (we), the undersigned¹
le(s) soussigné(s)¹

BERGLUND, Arthur

als Erfinder:²
do hereby designate as inventor(s)²:
désigne(nt) en tant qu'inventeur(s)²:

PERVAN, Tony
Rådjursstigen 32
S-170 72 SOLNA
Sweden

☐ (Weitere Erfinder sind auf einem gesonderten Blatt angegeben).³
(Additional inventors indicated on supplementary sheet).³
(les autres inventeurs sont mentionnés sur une feuille supplémentaire).³

Erklärung darüber, wie der (die) Anmelder das Recht auf das europäische Patent erlangt hat (haben):⁴
Statement indicating the origin of the right to the European patent:⁴
Déclaration indiquant l'origine de l'acquisition du droit au brevet:⁴

By agreement

Ort/Place/Lieu Malmö

Datum/Date 20 February 1995

Unterschrift(en) des (der) Anmelders (Anmelder) oder Vertreters (Vertreter)
Signature(s) of Applicant(s) or Representative(s)
Signature(s) de (des) demandeur(s) ou du (des) mandataire(s)

Arthur Berglund
Authorised Representative

— Namen des (der) Unterzeichneten mit Schreibmaschine wiederholen — / — Please supplement signature(s) by typewritten name(s) — / — dactylographier le(s) nom(s) du (des) signataire(s) en-dessous de la signature —



P.B.5818 - Patentlaan 2
2280 HV Rijswijk (ZH)
☎ (070) 3 40 20 40
TX 31851 epo nl
FAX (070) 3 40 30 18

Europäisches
Patentamt

Zweigstelle
in Den Haag
Prüfungs-
abteilung



European
Patent Office

Branch at
The Hague
Examining
division

Office européen
des brevets

Département à
La Haye
Division
d'examen

Andersson, Per-Olof
AWAPATENT AB,
Box 5117
S-200 71 Malmö
SUEDE



Datum/Date
18/01/96

ichen/Ref./Réf.	Anmeldung Nr./Application No./Demande n°./Patent Nr./Patent No./Brevet n°.
2950767 PCT/SE9400386	94915725.9-2303 / 0698162
Anmelder/Applicant/Demandeur/Patentinhaber/Proprietor/Titulaire VALINGE ALUMINIUM AB	

**NOTIFICATION OF EUROPEAN PUBLICATION NUMBER AND INFORMATION
ON THE APPLICATION OF ARTICLE 67(3) EPC**

The provisional protection under Article 67(1) and (2) EPC in the individual Contracting States becomes effective only when the conditions referred to in Article 67(3) EPC have been fulfilled (for further details, see information brochure of the European Patent Office "National Law relating to the EPC" and additional information in the Official Journal of the European Patent Office).

Pursuant to Article 158(1) EPC the publication under Article 21 PCT of an international application for which the European Patent Office is a designated Office takes the place of the publication of a European patent application.

The bibliographic data of the above-mentioned Euro-PCT application will be published on 28.02.96 in Section I.1 of the European Patent Bulletin.

The European publication number is 0698162.

In all future communications to the European Patent Office, please quote the application number plus Directorate number.

RECEIVING SECTION

